


CONCRETE

UN POLISHED MARBLE AND AGGLOMERATES

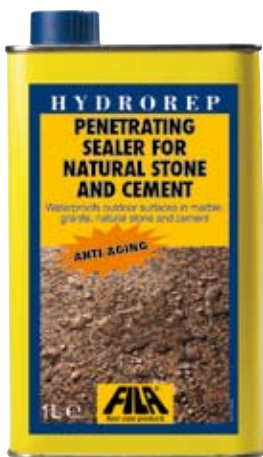

Half of this porous stone has been treated with Fila products while the other half has not. On the treated side (right), the drip-effect of water is visible. On the untreated side the water has penetrated the floor.

## WHAT IT'S FOR

- Protects exterior pavings from water and humidity.
- Makes walls and claddings water-repellent.
- Ideal for brick veneers and concrete.
- Protects grout joints.
- Protects from wear caused by atmospheric agents.

## ADVANTAGES

- Gives a long-lasting, renewable protection that allows the material to breathe.
- Does not alter the appearance of the surface.
- Does not yellow despite environmental conditions or ageing.
- High penetration capacity.
- High coverage.
- Prevents formation of moss and mold.
- Certified as suitable for use on food contact surfaces.
- Prevents efflorescence.

## HOW IT'S USED


**No dilution:** ready to use.

### Application:

Apply an even, generous coat onto a perfectly clean and dry surface with brush or roller. On vertical surfaces, the airless spray method is recommended. Apply until no more product can be absorbed. Depending on the absorbency of the substrate, a second coat may be required, after 24 hours. On low-absorbency natural stone (such as slate) apply one coat. For concrete or more porous natural stone two coats are needed. On exterior surfaces where oil-repellence is also required, apply a finishing coat of **Filafob** after 24 hours.

### Maintenance:

diluted solution of FilaCleaner



### Caution:

When protecting low porosity natural stone, spot test the product in advance on a small trial surface to check for colour changes

### COVERAGE

With one litre:

Natural stone **20 m<sup>2</sup>**

"Coverage rates are approximate and refer to a single coat of the product"

### Packaging

1 litre cans in box of 12.  
5 litre cans in box of 4.

### COMPOSITION

Blend of siloxane compounds dispersed in de-aromatized hydrocarbon solvent.

Storage temperature: between 0° C and 30° C.  
Must be applied to material at temperatures between 5° and 30° C.

### LABELLING

#### Symbol

St Andrew's Cross

#### Risk Phrases

Flammable. Harmful: may cause lung damage if swallowed. Repeated exposure may cause skin dryness or cracking.

#### Safety Phrases

Keep out of the reach of children.  
Keep away from food, drink and animal feedingstuffs.  
Handle and open container with care. In case of fire use: earth, sand, chemical powder or foam. If swallowed, do not induce vomiting: seek medical advice immediately and show this container or label.

Contains: white spirit.



### TECHNICAL INFORMATION

**Appearance:** liquid

**Colour:** colourless

**Odour:** slight odour of hydrocarbon solvent

**Density:** 0.777 kg/litre

**Flash point:** 40°C

The information above reflects our latest technical know-how and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and check. Fila accepts no liability for improper use of its products.