




- TERRACOTTA
- QUARRY TILES
- PORCELAIN STONWARE
- UNPOLISHED MARBLE AND AGGLOMERATES
- GLAZED CERAMIC TILES
- CONCRETE
- WALLS

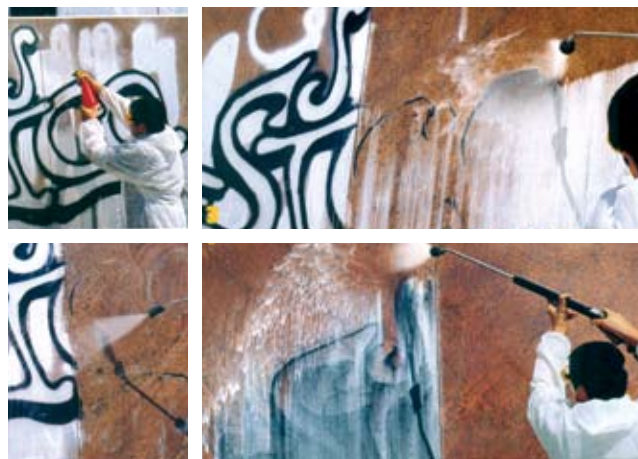

WHAT IT'S FOR

- Removes graffiti from both treated and untreated walls: It is especially useful on rough or porous surfaces (concrete, brick veneers, natural stone, etc.).
- Penetrating detergent and grease remover.
- Removes grime and dirt from external walls.
- Removes filmy and paint layers from terracotta ("oxblood" type).

ADVANTAGES

- Easy to use.
- Ready to use: no dilution required.
- Not corrosive.

HOW IT'S USED

Do not dilute: Ready to use.

Application:

1. Spread directly on the wall with a flat brush or using the airless method.
2. Leave to act for a minimum of 5 minutes.
3. Rub with scrubbing pad.
4. Rinse. For the best results, use a water-jet cleaner.

Repeat application and rinsing if necessary (e.g. on porous surfaces such as brick veneers, natural stone, etc.).

Packaging

1 litre (1.06 qt) flasks in box of 12.

PRECAUTIONS

- Keep out of the reach of children.
- Dispose of the container properly after use.

TEMPERATURE

Storage temperature:
between 41° F (5° C) and 86° F (30° C).
Must be applied to material at temperatures
between 41° F (5° C) and 86° F (30° C).

LABELLING

Contains 1 - methoxy - 2 propanol and n-butyl acetate. If in eyes, rinse with water for 15 minutes and call physician. If on skin, rinse well with water. If swallowed, call a Poison control centre or doctor immediately. Do not induce vomiting. Keep Out of the Reach of Children.

TECHNICAL INFORMATION

Appearance: liquid
Color: yellowish
Odour: penetrating
Density: 1.023 kg/litre
pH: 5.5

The information above reflects our latest technical know-how and is the outcome of ongoing laboratory research and testing. However, some factors are beyond our control. It is essential to integrate our suggestions with your own on-site preliminary tests and check. Fila accepts no liability for improper use of its products.